

FoxUV™ 350nm LED 5mm Soft Lens

FG350-R5--WC015S



FEATURES AND APPLICATIONS

- Deep UV wavelength, highly consistent
- HVPE epitaxy process, patent protected, unique in the industry
- UV lamps for medical/biomedical uses, sensors, and scientific applications
- RoHS compliant

SPECIFICATIONS

Absolute Maximum Rating (Ta = 25°C)


Item	Symbol	Maximum Rating	Unit
DC Forward Current	I _f	30	mA
Pulse Forward Current*	I _{fp}	80	mA
Reverse Voltage	V _r	5	V
Operating Temperature	T _{opr}	-20 to +80	°C
Storage Temperature	T _{stg}	-40 to +100	°C

*Condition: Duty Cycle: 1/10, Pulse Width: 10msec

Optical and Electrical Characteristics (Ta = 25°C)

Item	Symbol	Condition	Min	Typ.	Max	unit
Forward Voltage	V _f	I _f =20mA	3.6	4.3	5.0	V
Reverse Current	I _r	V _r =5V	-	-	100	μA
Peak Wavelength	λ _p	I _f =20mA	350	351	353	nm
Viewing Angle		I _f =20mA	-	15	-	deg.
Output Power/Flux	P _o	I _f =20mA	100	200	350	μW

Lamp Dimensions (typical)

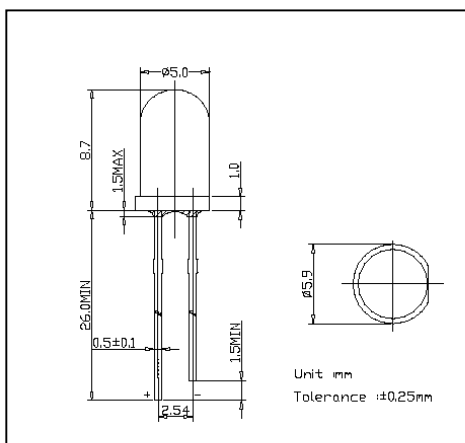

- Soft polymer lens, 5 mm (T-1 3/4 package), UV resistant
- Water clear


Rev. F, Jan. 2014

The Fox Group, Inc.

FoxUV™ 350nm LED 5mm Soft Lens FG350-R5--WC015S



Typical Spectrum

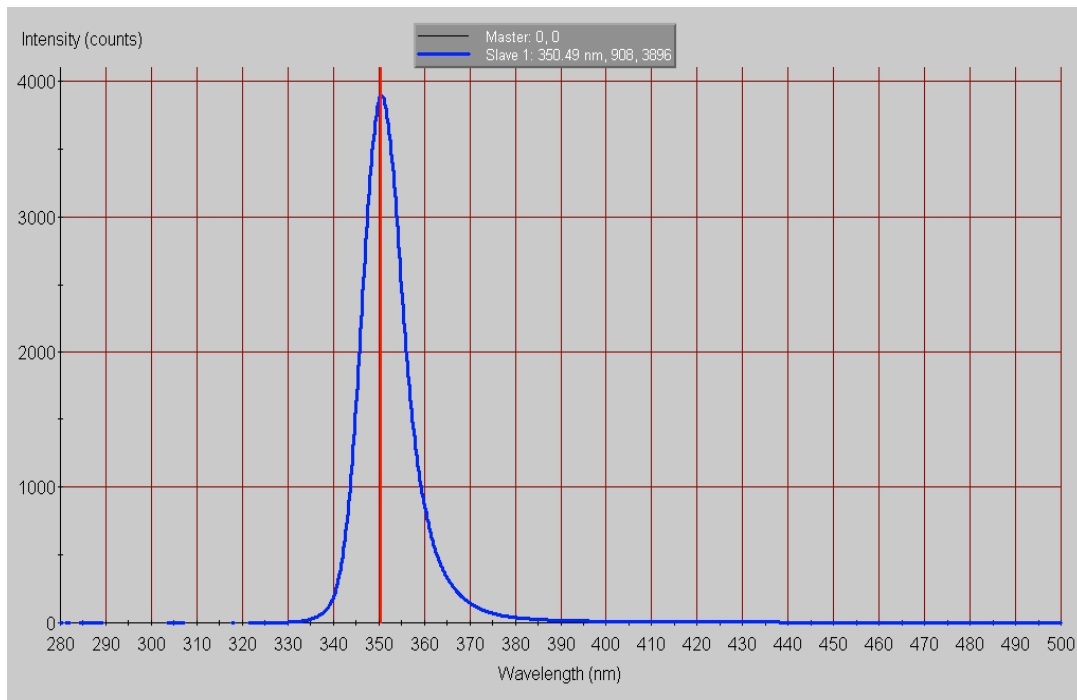

Warnings and Handling Instructions

- UV LEDs emit intense but mainly invisible ultraviolet radiation when in operation, which may be harmful to eyes, even for brief periods.
- *** DO NOT LOOK DIRECTLY INTO THE UV LED DURING OPERATION ***
- *** BE SURE THAT YOU AND ALL PERSONS IN THE VICINITY WEAR SAFETY GOGGLES THAT PROVIDE SUITABLE UV PROTECTION WHEN A UV LED IS OPERATING ***
- *** KEEP CHILDREN AWAY FROM THE OPERATING VICINITY ***
- *** KEEP UV LEDs OUT OF THE REACH OF CHILDREN ***
- If you incorporate a UV LED into a product, be sure to provide appropriate cautionary labels and instructions.
- Please follow all standard procedures for storing, handling, cleaning, mounting, soldering, disposal, or otherwise handling LED dies or packaged LEDs, including static electricity protection.

Rev. F, Jan. 2014

The Fox Group, Inc.