


**SURFACE MOUNT
SCHOTTKY BARRIER DIODE**
**REVERSE VOLTAGE – 30 Volts
FORWARD CURRENT – 0.03 mAmpere**
FEATURES

- Low Forward Voltage Drop
- Flat Lead SOD-523F Small Outline Plastic Package
- Extremely Small SOD-523F Package
- Surface Device Type Mounting
- RoHS Compliant
- Green EMC
- Matte Tin(Sn) Lead Finish
- Band Indicates Cathode

MECHANICAL DATA

- Case: SOD-523F Plastic

SOD-523F


SOD-523F		
DIM.	MIN.	MAX.
A	1.10	1.30
B	1.50	1.70
C	0.7	0.9
D	0.25	0.35
E	0.50	0.70
F	0.05	0.20
All Dimensions in millimeter		

Maximum Ratings & Thermal Characteristics @ $T_A = 25^\circ\text{C}$ unless otherwise specified

Characteristic	Symbol	RB751S-40F	Units
Power Dissipation	P_D	200	mW
Reverse Voltage	V_R	30	V
Forward Current	I_F	30	mA
Operating Temperature Range	T_J	+125	$^\circ\text{C}$
Storage Temperature Range	T_{STG}	-55~+125	$^\circ\text{C}$
Peak Reverse Voltage	V_{RM}	40	V
Non-Repetitive Peak Forward Current	I_{FSM}	500	mA

Electrical Characteristics @ $T_A = 25^\circ\text{C}$ unless otherwise specified

Characteristic	Test Condition	Symbol	RB751S-40F	Unit
Breakdown Voltage	$I_R = 10\mu\text{A}$	BV	30	V
Maximum DC Reverse Current at Rated DC Blocking Voltage	$V_R = 30\text{V}$	I_R	0.5	μA
Maximum DC Forward Voltage	$I_F = 1\text{mA}$	V_F	0.37	V

These ratings are limiting values above which the serviceability of the diode may be impaired.

REV. 0, Aug-2011, KSHR65

RATING AND CHARACTERISTIC CURVES

RB751S-40F

LITEON

FIG.1-TYPICAL FORWARD CHARACTERISTICS

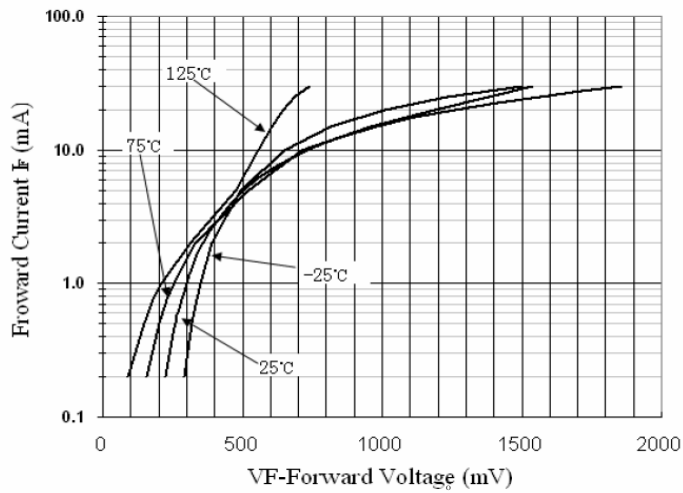


FIG.2-TYPICAL REVERSE CHARACTERISTICS


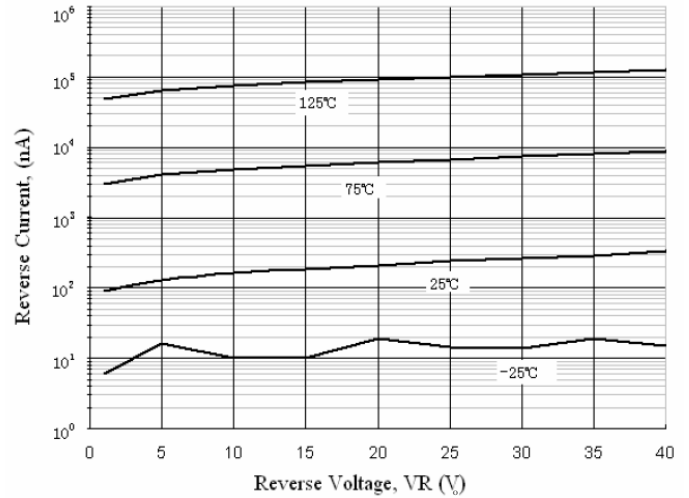


FIG.3-TYPICAL JUNCTION CAPACITANCE

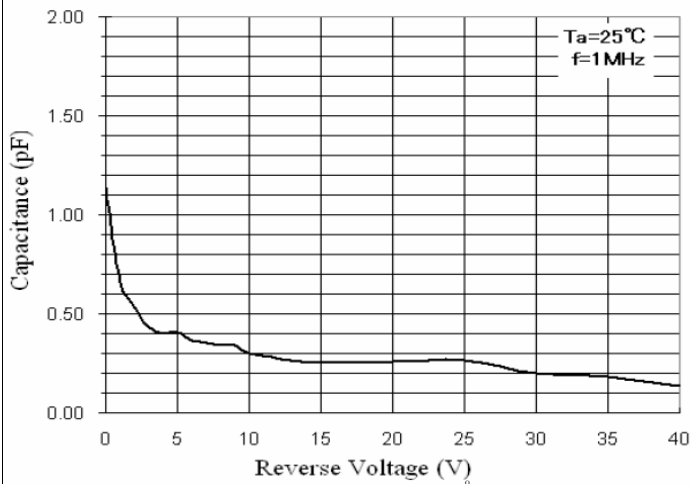

Device Marking :

Device P/N	Marking	Equivalent Circuit Diagram
RB751S-40F	4B	1 ○ ——— <————○ 2

Important Notice and Disclaimer

LSC reserves the right to make changes to this document and its products and specifications at any time without notice. Customers should obtain and confirm the latest product information and specifications before final design, purchase or use.

LSC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does LSC assume any liability for application assistance or customer product design. LSC does not warrant or accept any liability with products which are purchased or used for any unintended or unauthorized application.

No license is granted by implication or otherwise under any intellectual property rights of LSC.

LSC products are not authorized for use as critical components in life support devices or systems without express written approval of LSC.