UV-LOF-001-C15-HW-S Data Sheet

Optics Lens + White PC Holder + Sticker

For UVA/UVB Application

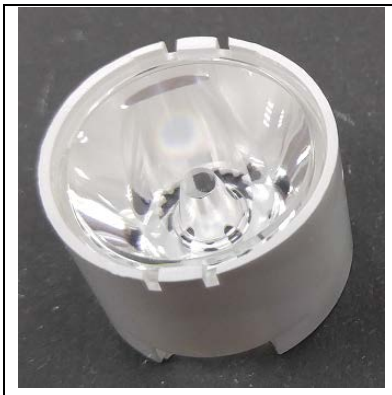

Dimension:23.46 x 15.8 mm

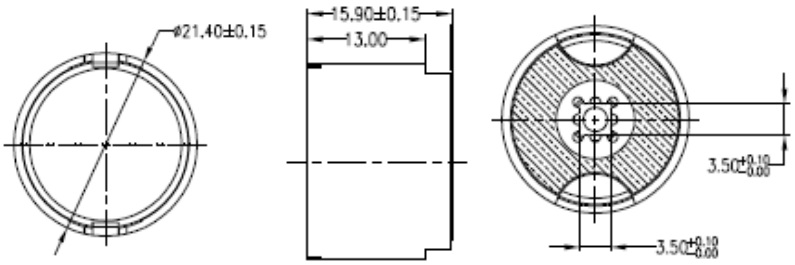

Angle (Degrees): (Below Relative intensity are for TSLC N3535U)

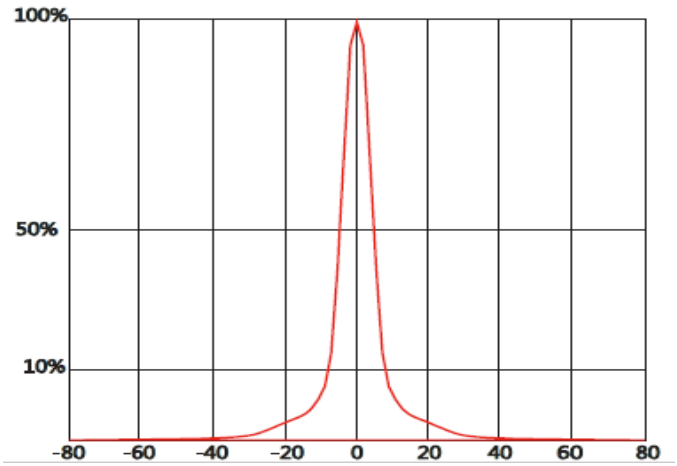

FWHM : 9° Suggest Operating Distance: >10 cm
(Beam Pattern About 2cm)

Material: PMMA
Optics Transmittance:

>400nm	92%
395nm	91%
365nm	89%
325nm	>80%

Optics efficiency : 88%
Vicat Softening Temp: 105° C
Operating Temp Range:-40～+90° C
Holder Material : PC



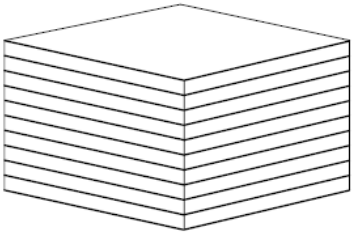



10x10 pcs in plate 10 plate in outer box 1000 pcs /outer box

29 * 29 * 22 cm / G.W. xx.xxkg

Ziga Co., Ltd. 24161 新北市三重區重陽路一段 67 號 2 樓

www.YesLED.com / Info@YesLED.com