



CLD156

Large Active Area Silicon Planar photodiode

This product is tested to satisfy the conditions of both the CLD156 and the CLD156R.

CLAIREX®
SEMICONDUCTOR

13-1560A

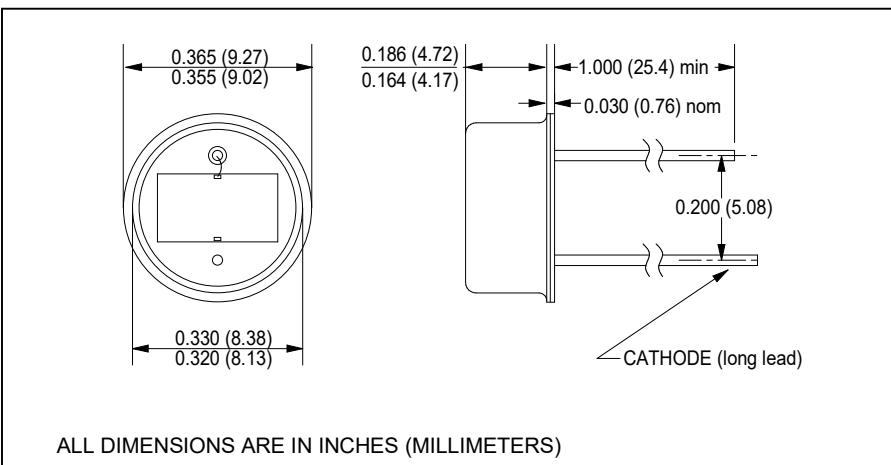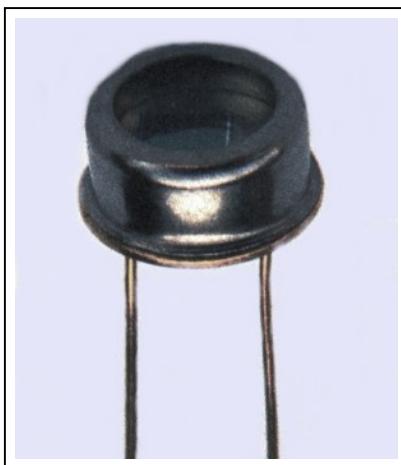

features

- 100° acceptance angle
- 860nm peak response
- TO-5 hermetic style package
- usable for visible through near-IR

description

The CLD156 and CLD156R are 0.122" x 0.222" active area silicon photodiodes featuring high linearity, low dark current and fast response. The TO-5 header provides thermal environment for reliable operation over a wide temperature range. Wide acceptance angle permits use in IR air communications, ambient light detection, safety and monitoring, security systems, etc. For additional information, call Clairex.

absolute maximum ratings ($T_A = 25^\circ\text{C}$ unless otherwise stated)

storage temperature.....	-35°C to +150°C
operating temperature.....	-35°C to +150°C
lead soldering temperature ⁽¹⁾	260°
reverse voltage	30V
continuous power dissipation ⁽²⁾	200mW

notes:

1. 0.06" (1.5mm) from the header for 5 seconds maximum.
2. Derate linearly 1.28mW/°C free air temperature to $T_A = +150^\circ\text{C}$.
3. Radiation source is a tungsten lamp at a color temperature of 2854K and $E_e = 5\text{mW/cm}^2$ or equivalent.

electrical characteristics ($T_A = 25^\circ\text{C}$ unless otherwise noted)

symbol	parameter	min	typ	max	units	test conditions
I_{SC}	Short-circuit current ⁽³⁾	-	100	-	μA	$V_{BIAS} = 0\text{V}$
I_D	Dark current CLD156	-	-	50	nA	$V_F = 100\text{mV}$, $E_e = 0$
	CLD156R	-	-	50	nA	$V_R = 15\text{V}$, $E_e = 0$
V_O	Open circuit voltage ⁽³⁾	-	0.35	-	V	$E_e = 5\text{mW/cm}^2$
C_J	Junction capacitance	-	-	400	pF	$V_{BIAS} = 0\text{V}$, $f = 1\text{MHz}$
t_r , t_f	Output rise and fall time	-	-	10	μs	$R_L = 1\text{k}\Omega$
Θ_{HP}	Total angle at half sensitivity points	-	100	-	deg.	

Clairex reserves the right to make changes at any time to improve design and to provide the best possible product.